

Original document

INTERVERTEBRAL DISC PROTHESIS

Patent number: WO2005104996

Publication date: 2005-11-10

Inventor: ZEEGERS WILLEM

Applicant: LDR MEDICAL (FR)

Classification:

- international: *A61F2/44; A61F2/00; A61F2/30;*

A61F2/44; A61F2/00; A61F2/30; (IPC1-7):
A61F2/44

- european:

Application number: WO2005IB01151 20050428

Priority number(s): FR20040004501 20040428

[View INPADOC patent family](#)


Also published as:


US2005246024


(A1)


FR2869528 (A1)

Cited documents:

 WO03075804
DE20310432U

 DE20310433U
US5507816

 FR2718635
US5888226

 US2004002761
US2004073311

[less <<](#)

[Report a data error here](#)

Abstract of **WO2005104996**

The present invention relates to an intervertebral disc prosthesis preferably comprising at least three pieces including an upper plate (1), a lower plate (2) and a mobile core (3) at least in relation to the lower plate (2), co-operation means (23, 33) allowing to limit or eliminate the movements of the core (3) in relation to the lower plate (2), in translation and in rotation, respectively, about an axis substantially parallel to the lower plate (2) and about an axis substantially perpendicular to the lower plate (2), at least one part of the surface of at least one plate being curved and complementary with a curved surface (30) of the core (3), with which it is in contact, wherein the top (31) of the curved surface (30) of the core (3) is off centre, in at least one direction, in relation to the centre (32) of this curved surface (30).

Data supplied from the *esp@cenet* database - Worldwide

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 November 2005 (10.11.2005)


PCT

(10) International Publication Number
WO 2005/104996 A1

- (51) International Patent Classification⁷: **A61F 2/44** (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/IB2005/001151
- (22) International Filing Date: 28 April 2005 (28.04.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 04/04501 28 April 2004 (28.04.2004) FR
- (71) Applicant: LDR MEDICAL [FR/FR]; 4, rue Marie Curie, F-10430 Rosieres Pres Troyes (FR).
- (72) Inventor: ZEEGERS, Willem; Bunderstraat 83, NL-6231 EJ Meerssen (NL).
- (74) Agent: DEBAY, Yves; Cabinet Debay, 126 Elysée 2, F-78170 La Celle Saint Cloud (FR).
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: INTERVERTEBRAL DISC PROTHESIS

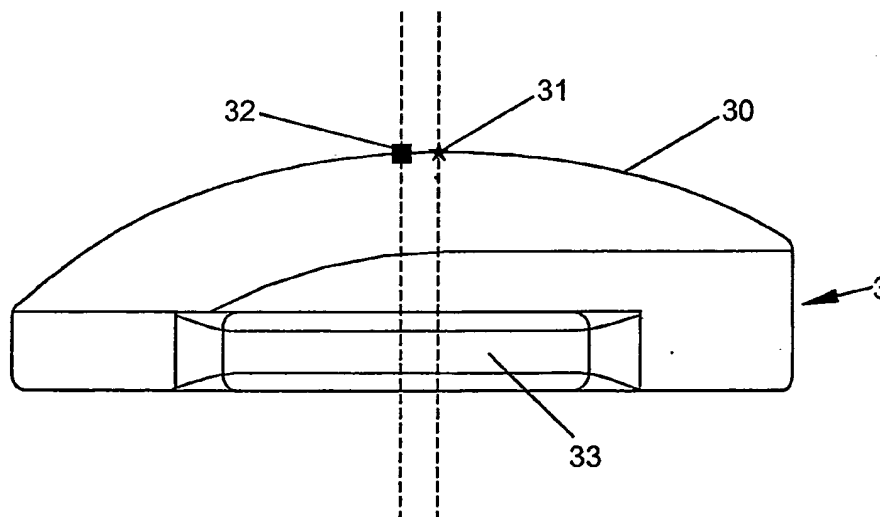

(57) Abstract: The present invention relates to an intervertebral disc prosthesis preferably comprising at least three pieces including an upper plate (1), a lower plate (2) and a mobile core (3) at least in relation to the lower plate (2), co-operation means (23, 33) allowing to limit or eliminate the movements of the core (3) in relation to the lower plate (2), in translation and in rotation, respectively, about an axis substantially parallel to the lower plate (2) and about an axis substantially perpendicular to the lower plate (2), at least one part of the surface of at least one plate being curved and complementary with a curved surface (30) of the core (3), with which it is in contact, wherein the top (31) of the curved surface (30) of the core (3) is off centre, in at least one direction, in relation to the centre (32) of this curved surface (30).



— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERVERTEBRAL DISC PROSTHESIS

The present invention relates to an intervertebral disc prosthesis, intended to be substituted for fibro-cartilaginous discs ensuring a bond between the vertebrae of the spinal column.

5 Various types of intervertebral disc prostheses are known in the prior art. Numerous prostheses, such as for example in the patent application FR 2 846 550 and WO 02 089 701, are constituted in a lower plate and an upper plate forming a sort of cage around a central core. A part of these prostheses enables the upper plate to swivel in relation to the central core and optionally
10 permits the central core to slide in relation to the lower plate. This sliding of the central core in relation to the lower plate is an essential characteristic, as it must allow spontaneous positioning of the core in the ideal position to absorb constraints imposed on the prosthesis, during movements made by the patient wearing the prosthesis. The displacement of the core, co-
15 operating with at least a plate about an uneven surface, enables an inclination between the plates of the prosthesis which facilitates the mobility of the patient wearing the prosthesis. The displacement of the core also prevents it from creeping when subjected to major constraints.

In this context, it is significant to propose a prosthesis which allows to
20 impose a permanent inclination between the plates and induces, for example, lordosis. Depending on the disorder of the spinal column of the patient wearing the prosthesis, it is sometimes preferable that the prosthesis allows a correction of this disorder. In line with the wishes of the surgeon, the displacement of the core should be restricted in at least one direction.
25 However, when the patient moves, the relative position of the elements of the prosthesis can be modified, within the permitted range of displacement.

One aim of some embodiments of the present invention is to propose an intervertebral disc prosthesis allowing limited movements of the different pieces of the prosthesis between one another and comprising a core used to
30 restrict its displacement in at least one direction.

Summary:

An intervertebral disc prosthesis includes at least three pieces including a first plate, a second plate, and a mobile core, at least in rotation, at least in relation to one of the plates, the core having a curved surface in
5 contact with at least a part of a complementary curved surface of the first plate, and a substantially flat surface in contact with at least a part of a substantially flat of the second, male and female co-operation means situated near the periphery of the second plate and of the core allowing, to limit or prevent, the movements in translation of the core in relation to the second
10 plate to along an axis substantially parallel to the substantially flat surfaces, and allowing to limit or prevent the movements in rotation of the core in relation to the second plate, about an axis substantially perpendicular to the substantially flat surfaces, wherein the top of the curved surface of the core is off centre, in at least one direction, in relation to the geometric centre of this
15 curved surface of the core.

According to another embodiment, the rest position of the core, that being when the patient is motionless, is shifted in the opposite direction to that of the off centre of the top of the curved surface of the core, thanks to the fact that the axes of symmetry of the first and second plates are aligned
20 when the plates are anchored on the vertebrae and that the curved surface of the first plate, complementary with the curved surface of the core, induces the aligning of the off-centre top of this curved surface of the core with the axes of symmetry of the plates and therefore a shifting of the core in the opposite direction to that of the off centre of the top of its curved surface,
25 which provokes a bringing together of the co-operation means present on the core and those present on the second plate, this bringing together consequently limits the displacement of the core in the opposite direction to that of the off centre of the top of its curved surface.

According to another embodiment, the same plates can be assembled
30 with different cores, the difference between the cores consisting in the

position of the top of their curved surface in relation to the centre of this curved surface of the core.

According to another embodiment, the same cores can be assembled with different plates, the difference between the plates consisting in the angle
5 between the median planes representing the upper and lower surfaces of the plates.

According to another embodiment, an angle between the upper surface of the upper plate and the lower surface of the second plate can be imposed either by the fact that the median planes representing the upper and
10 lower surfaces of the second plate and/or the first plate create an angle, or by restricting, thanks to the co-operation means, movements of the core about a position imposing an inclination of at least one of the plates.

According to another embodiment, the same plates can be assembled with cores of different thicknesses and/or sizes.

15 According to another embodiment, the curved surface of the core is a convex upper surface of the core and the curved surface of the first plate is a concave part of the lower surface of the upper plate.

According to another embodiment, the dimensions of each male co-operation means are slightly less than those of each female co-operation
20 means so as to allow slight clearance between the core and the second plate.

According to another embodiment, the dimensions of each male means are substantially the same as those of each female means so as to prevent any clearance between the core and the second plate.

25 According to another embodiment, the core is made of polyethylene.

According to another embodiment, first and second plates are made of metal.

According to another embodiment, the second plate comprises female means co-operating with male means of the core.

30 According to another embodiment, the male means of the core are two contact plates situated on the two side edges of the core and the female

means of the second plate are four walls situated, in pairs, on each of the two lateral edges of the second plate.

According to another embodiment, the walls forming the female co-operation means of the second plate are curved toward the centre of the prosthesis, so as to cover at least a part of the male means of the core and to prevent it from lifting.

According to another embodiment, the second plate comprises male means co-operating with female means of the core.

According to another embodiment, the male means of the second plate are two contact plates facing one another on two edges of the prosthesis, and the female means of the core are two recesses.

According to another embodiment, the male means of the second plate are two walls facing one another in the vicinity of two edges of the prosthesis, and the female means of the core are recesses.

According to another embodiment, the male means of the second plate are two nibs curved toward the interior of the prosthesis and facing one another on two edges of the prosthesis, and the female means of the core are two recesses.

According to another embodiment, at least one of the nibs is replaced by a contact plate fitted with a bore on which is fixed a lug by way of a pin penetrating the bore.

According to another embodiment, the first plate is bulged on at least a part of its upper surface to adapt to the form of the vertebrae.

Brief Description of the Drawings:

Other features and advantages of the various embodiments are presented in the description herein below, given in reference to the attached drawings, in which:

— figures 1a and 1b respectively illustrate, a side view and a top view of the core of the prosthesis according to one embodiment of the invention,

- figures 2a and 2b respectively illustrate a front view and a side view of the prosthesis, in a first embodiment of the invention, and figures 2c and 2d respectively illustrate a front view in perspective and a side view of the prosthesis, in a second embodiment of the invention,
- 5 – figures 3a and 3b respectively illustrate a top view and a cross section view according to the plan A-A in figure 3a, of the lower plate of the prosthesis in an embodiment of the invention, figure 3c illustrates a top view of the lower plate with the core and figures 3d and 3e respectively illustrate a top view and a cross section view according to the plan B-B in figure 3d, of
10 the upper plate of the prosthesis in an embodiment of the invention.

Detailed Description of Preferred Embodiments:

The intervertebral disc prosthesis according to one embodiment of the present invention is constituted in a first plate (1) articulated in relation to a
15 second plate (2) by means of a core (3), as evident in particular in figures 2a to 2d. In the following description, the first plate (1) is called the upper plate and the second plate (2) is called the lower plate, according to the orientation given to the prosthesis shown in the drawings. Without departing from the scope of the present invention, the prosthesis herein described could also be
20 inversely oriented between the vertebrae, so that the first plate (1) would be the lower plate and the second plate (2) would be the upper plate. As described below, the first plate comprises a curved surface (concave or convex) cooperating with a curved and complementary surface (convex or concave) of the nucleus and the second plate comprises a substantially flat
25 surface cooperating with a substantially flat surface of the nucleus. These various surfaces described can belong to any of the first and second plate of the prosthesis without departing from the scope of the invention.

An advantage of the prosthesis according to this embodiment of the present invention is that it comprises simple pieces which can be
30 dimensioned in order to be adapted to the different vertebrae of the spinal column.

The core (3) is of slight thickness (from 3 to 15 mm, depending on the vertebrae between which the prosthesis is to be inserted). For good absorption of the constraints, the core (3) could, for example, be made of polyethylene, a compressible material simulating the physical properties of elasticity of natural intervertebral discs.

The core (3) preferably has a convex part (30) on at least a part of at least one of its upper and lower surfaces. Preferably, the core (3) also has male or female co-operation means (33) complementary with respectively female or male co-operation means (23) present on at least one of the plates (1, 2).

The description of one of these embodiments will now be dealt with in reference to figures 1 to 3. In this embodiment, it is the upper surface of the core (3) which has a convex part (30), evident particularly in figure 1a. This convex surface (30) of the core (3) is complementary with a concave part (10) of the upper plate (1), evident particularly in figures 3d and 3e. This concave part (10) allows to incline the upper plate (1) when the patient wearing the prosthesis bends over. The lower surface of the core (3) and the upper surface of the lower plate (2) could be plane so as to permit clearance of the core (3) in relation to the lower plate (2), both in translation according to an axis substantially parallel to the lower plate (2), and in rotation about an axis substantially perpendicular to the lower plate (2). During movements by the patient wearing the prosthesis, this inclination of the upper plate (1) and this clearance of the core will allow displacement of the core (3) towards the ideal position to absorb the constraints applied to the prosthesis. The movement between the upper plate (1) and the core (3), as well as the clearance of the core (3) in relation to the lower plate (2) thus allow the patient to move, and, optionally, to eliminate the defects of positioning the prosthesis. This clearance likewise has the advantage of preventing premature wear due to the constraints applied to the prosthesis.

The intervertebral disc prosthesis according to some embodiments allows, for example, correcting the defects of lordosis. The presence of an angle between the upper plate (1) and the lower plate (2) of the prosthesis

could be desirable. Such an angle could be obtained by making an upper plate, whose median planes representing its lower and upper surfaces create an angle. Another possibility involves the lower plate whereof the median planes representing its lower and upper surfaces create an angle, as
5 illustrated in figures 2c and 2d, in which the lower surface (20) of the lower plate (2) create an angle with its upper surface. Another possibility to obtain such an angle is only allowed by prostheses of the same type as those of preferred embodiments of the invention and consists in a slightly offset position of the core in relation to the centre of the prosthesis. This slightly
10 offset position of the core can, for example, be maintained thanks to an adjustable positioning of the male and female co-operation means between themselves. If the surgeon wishes, for example, that the prosthesis induces lordosis which remains within a range of values, he will select a prosthesis whose core (3) can have slight clearance in translation and in rotation in
15 relation to the lower plate (2), but about a position imposing a slight permanent inclination of at least one of the plates, thanks to an accurate adjustment of the co-operation means between the core and the lower plate (2).

The prosthesis according to preferred embodiments has a
20 characteristic which improves its behaviour once positioned between the vertebrae of the patient. This feature resides in the fact that the top (31) of the curved surface (30) of the core (3), i.e. the highest point (31) of this curved surface (in a side view), is off centre in relation to the geometric centre (32) of this curved surface (30) of the core (3), i.e. the point (32)
25 equidistant from any point in the periphery of the curved surface (in a top view) or the intersection of the longitudinal and the transversal axes of symmetry of the core (3). In the examples shown, the curved surface (30) of the core (3) is convex and the curved surface of the first plate is a concave part (10) of the lower surface of the upper plate (1) but it is obvious that the
30 various elements of the instant prosthesis can be rearranged so that the convex surface is on one of the plates and the concave surface is on the core. The centre of the concave part (10) of the upper plate (1),

complementary with this convex surface (30), swivels around this top (31) of the convex surface (30). Although being mobile about this top (31), the upper plate (1) will therefore be on average centred on the top (31) of the convex surface (30) of the core (3). The vertical axes which pass through the centres
5 of two adjacent vertebrae are generally aligned, even though they can be slightly inclined depending on the movements of the patient or depending on the zone in question of the spinal column. It is therefore important that the vertical axes which pass through the centres of the plates (1, 2) and through the top (31) of the convex surface (30) of the core are also aligned. So that
10 these axes are aligned, the off-centre top (31) of the convex surface (30) of the core (3) must be in the axis of the centres of the plates and therefore of the core (3) that being off centre in relation to the lower plate (2). Thus the rest position of the core (3) will be off centre in relation to the centre of the prosthesis. As illustrated in figure 3C, in which the upper plate (1) is not
15 shown for reasons of clarity, the core is off centre in relation to the centre of the prosthesis and the co-operation means (33) of the core (3) are in contact with the co-operation means (23) of the lower plate (2), in the zones encircled with a dotted line. Figure 2B also emphasises this shift of the core (3) in relation to the side view of the centre of the prosthesis. The shifting of the
20 core (3) and the contact between the co-operation means (33) and those of the lower plate (23) will also restrict the displacement of the core (3) in the opposite direction to that of the off centre of the top (31) of the convex surface (30). We can then choose the direction and amplitude of the shift to be made to the top (31) of the convex surface (30) of the core (3), in order to
25 obtain a desired reduction in displacement. The core (3) can then, for example, only be displaced in the direction of the shifting of the top (31) in relation to the centre (32) of the convex surface (30) of the core (3). If the patient wearing the prosthesis according to this embodiment bends over in the opposite direction to this shifting of the top (31), the core (3) can then
30 move in the direction of this shifting of the top (31), thus reducing the shifting between the vertical axes passing through the centres of the plates, which is what would happen if the top (31) of the convex surface (30) of the core (3)

was not off centre. An essential consequence of this feature is therefore that it allows to permanently restrict the shifting between the vertical axes passing through the centres of the vertebrae, even when the patient bends over. For example, we can choose a core (3) whose top (31) of its convex surface (30) is off centre to the rear so that the core, in the rest position, is completely off centre to the front of the prosthesis and can not be displaced further forward. Such a core therefore restricts the displacement of the core to the front and reduces the angle to which the patient can bend backwards. However, if the patient bends forward, the upper plate (1) inclines to the front, thus inducing a shifting of the vertical axis passing through its centre, in relation to the vertical axis passing through the centre of the lower plate (2). However, this shifting is eliminated by displacing the core (3) to the rear of the prosthesis. This shifting is better eliminated when the upper plate is mobile about the off-centre top (31) of the convex surface (30) of the core (3). The core (3) with an off-centre top (31) then wedges into the rear of its opening in the prosthesis and allows a better alignment of the vertical axes passing through the centres of the plates than a core with an off-centre top does.

Another advantage of some embodiments relates to the implanting of prostheses between the vertebrae of a recipient patient. During implantation of prostheses with mobile cores, the core of the prosthesis has a tendency to move to a far end of its stroke in its opening within the prosthesis. The patient is thus equipped with a prosthesis which imposes a slight inclination to his/her spinal column. This inclination can be eliminated thanks to the movements of the patient as soon as he/she has recovered from the operation. However, this inclination provokes considerable discomfort for the patient. Thanks to the off-centre position of the top (31) of the core (3) of the prosthesis according to preferred embodiments, the core (3) would tend to move into an off-centre rest position, in which the top (31) is aligned in relation to the axes of the upper and lower plates. Thanks to this spontaneous alignment of the axes of the prosthesis, no inclination of the plates will be imposed in the rest position and the patient will have been equipped with a prosthesis that does not provoke any discomfort.

In the embodiment in figures 1 to 3, the core (3) has male co-operation means (33) complementary with female co-operation means (23) present on the lower plate (2). The male co-operation means (33) of the core (3) are, for example, hasps substantially parallelepiped in shape, as particularly visible in figures 1a and 1b. The female co-operation means (23) can, as particularly visible in figures 3a and 3b, consist, for example, in four walls situated, in pairs, on each of the two side edges of the lower plate (2). These walls could be curved toward the centre of the prosthesis, so as to cover at least a part of the male co-operation means (33) of the core (3) and avoid lifting the core (3) and the upper plate (1). In this embodiment illustrated in figures 1 to 3, the dimensions of each male means (33) of the core (3) are slightly less than those of each female means (22) of the lower plate (2), so as to allow a restricted clearance of the core (3) in relation to the lower plate (2), both in translation according to an axis substantially parallel to the lower plate (2), and in rotation about an axis substantially perpendicular to the lower plate (2). These co-operation means (23, 33) also prevent the core (3) from ejecting out of the prosthesis, in the event of too much constraint on the prosthesis.

In an alternative embodiment not shown, the dimensions of each male co-operation means (33) of the core (3) are substantially the same as those of each female co-operation means (23) of the lower plate (2), so as to avoid any clearance of the core (3) in relation to the lower plate (2), both in translation and in rotation. In the latter case, the only permitted movement of the prosthesis is that of the upper plate (1) in relation to the core (3).

In an alternative embodiment not shown, the core (3) has female co-operation means, consisting, for example, in complementary recesses of the male means present on the lower plate (2). These male means of the lower plate (2) can consist, for example, in two contact plates or two nibs, for example curved toward the interior of the prosthesis and facing one another on two edges of the lower plate (2).

In another alternative embodiment not shown, the lower plate (2) has dowels. The core (3), by way of complement, has two wells under its lower

surface. The dimensions of the dowels of the lower plate (2) and of the wells of the core (3) will be adapted according to the desired result, by choice, of slight clearance of the core in translation and in rotation or any clearance.

In an alternative embodiment not shown, a part of the upper surface of the upper plate (1) is bulged, so as to better adapt to the vertebra on which the prosthesis is intended to be placed, the lower surface of the vertebrae being hollow. The bulged part of the upper plate (1) is then situated in the front part of the upper plate. The lower plate (2) is substantially plane as its lower surface has no need to be bulged or hollow, since the upper surface of the vertebrae is substantially flat.

It must be evident for specialists that the invention allows embodiments in numerous other specific forms without departing from the scope of application of the invention as claimed. As a consequence, the embodiments must be considered by way of illustration, but can be modified within the scope defined by the range of the attached claims, and the invention does not have to be limited to the details given above.

Claims

1. An intervertebral disc prosthesis comprising at least three pieces including a first plate (1), a second plate, (2) and a mobile core (3), at least in rotation, at least in relation to one of the plates (1, 2), the core (3) having a
5 curved surface in contact with at least a part of a complementary curved surface of the first plate (1), and a substantially flat surface in contact with at least a part of a substantially flat of the second, male and female co-operation means (23, 33) situated near the periphery of the second plate (2) and of the core (3) allowing, to limit or prevent, the movements in translation
10 of the core in relation to the second plate to along an axis substantially parallel to the substantially flat surfaces, and allowing to limit or prevent the movements in rotation of the core in relation to the second plate, about an axis substantially perpendicular to the substantially flat surfaces, wherein the top (31) of the curved surface (30) of the core (3) is off centre, in at least one
15 direction, in relation to the geometric centre (32) of this curved surface (30) of the core (3).

2. Intervertebral disc prosthesis set forth in claim 1, wherein the rest position of the core (3), that being when the patient is motionless, is shifted in the opposite direction to that of the off centre of the top (31) of the curved
20 surface (30) of the core (3), thanks to the fact that the axes of symmetry of the first (1) and second (2) plates are aligned when the plates are anchored on the vertebrae and that the curved surface (10) of the first plate (1), complementary with the curved surface (30) of the core (3), induces the aligning of the off-centre top (31) of this curved surface (30) of the core (3)
25 with the axes of symmetry of the plates (1, 2) and therefore a shifting of the core (3) in the opposite direction to that of the off centre of the top (31) of its curved surface (30), which provokes a bringing together of the co-operation means (33) present on the core (3) and those (23) present on the second plate (2), this bringing together consequently limits the displacement of the

core (3) in the opposite direction to that of the off centre of the top (31) of its curved surface (30).

3. Intervertebral disc prosthesis set forth in claim 1, wherein the same plates (1, 2) can be assembled with different cores (3), the difference
5 between the cores (3) consisting in the position of the top (31) of their curved surface (30) in relation to the centre (32) of this curved surface (30) of the core (3).

4. Intervertebral disc prosthesis set forth in claim 1, wherein the same cores (3) can be assembled with different plates (1, 2), the difference
10 between the plates consisting in the angle between the median planes representing the upper and lower surfaces of the plates.

5. Intervertebral disc prosthesis set forth in claim 1, wherein an angle between the upper surface of the upper plate (1) and the lower surface of the second plate (2) can be imposed either by the fact that the median planes
15 representing the upper and lower surfaces of the second plate (2) and/or the first plate (1) create an angle, or by restricting, thanks to the co-operation means (23, 33), movements of the core (3) about a position imposing an inclination of at least one of the plates (1, 2).

6. Intervertebral disc prosthesis set forth in claim 1, wherein the same
20 plates (1, 2) can be assembled with cores (3) of different thicknesses and/or sizes.

7. Intervertebral disc prosthesis set forth in claim 1, the curved surface (30) of the core (3) is a convex upper surface of the core (3) and the curved surface (10) of the first plate (1) is a concave part of the lower surface of the
25 upper plate (1).

8. Intervertebral disc prosthesis set forth in claim 1, wherein the dimensions of each male co-operation means (33) are slightly less than those of each female co-operation means (23) so as to allow slight clearance between the core (3) and the second plate (2).

9. Intervertebral disc prosthesis set forth in claim 1, wherein the dimensions of each male means (33) are substantially the same as those of each female means (23) so as to prevent any clearance between the core (3) and the second plate (2).

5 10. Intervertebral disc prosthesis set forth in claim 1, wherein the core (3) is made of polyethylene.

11. Intervertebral disc prosthesis set forth in claim 1, wherein first (1) and second (2) plates are made of metal.

10 12. Intervertebral disc prosthesis set forth in claim 1, wherein the second plate (2) comprises female means (23) co-operating with male means (33) of the core (3).

15 13. Intervertebral disc prosthesis set forth in claim 12, wherein the male means (33) of the core (3) are two contact plates situated on the two side edges of the core (3) and the female means (23) of the second plate (2) are four walls situated, in pairs, on each of the two lateral edges of the second plate (2).

20 14. Intervertebral disc prosthesis set forth in claim 13, wherein the walls forming the female co-operation means (23) of the second plate (2) are curved toward the centre of the prosthesis, so as to cover at least a part of the male means (33) of the core (3) and to prevent it from lifting.

15. Intervertebral disc prosthesis set forth in claim 1, wherein the second plate (2) comprises male means co-operating with female means of the core (3).

25 16. Intervertebral disc prosthesis set forth in claim 15, wherein the male means of the second plate (2) are two contact plates facing one another on two edges of the prosthesis, and the female means of the core (3) are two recesses.

17. Intervertebral disc prosthesis set forth in claim 15, wherein the male means of the second plate (2) are two walls facing one another in the

vicinity of two edges of the prosthesis, and the female means of the core (3) are recesses.

18. Intervertebral disc prosthesis set forth in claim 15, wherein the male means of the second plate (2) are two nibs curved toward the interior of the prosthesis and facing one another on two edges of the prosthesis, and
5 the female means of the core (3) are two recesses.

19. Intervertebral disc prosthesis set forth in claim 18, wherein at least one of the nibs is replaced by a contact plate fitted with a bore on which is fixed a lug by way of a pin penetrating the bore.

10 20. Intervertebral disc prosthesis set forth claim 1, wherein the first plate (1) is bulged on at least a part of its upper surface to adapt to the form of the vertebrae.

FIGURE 1A


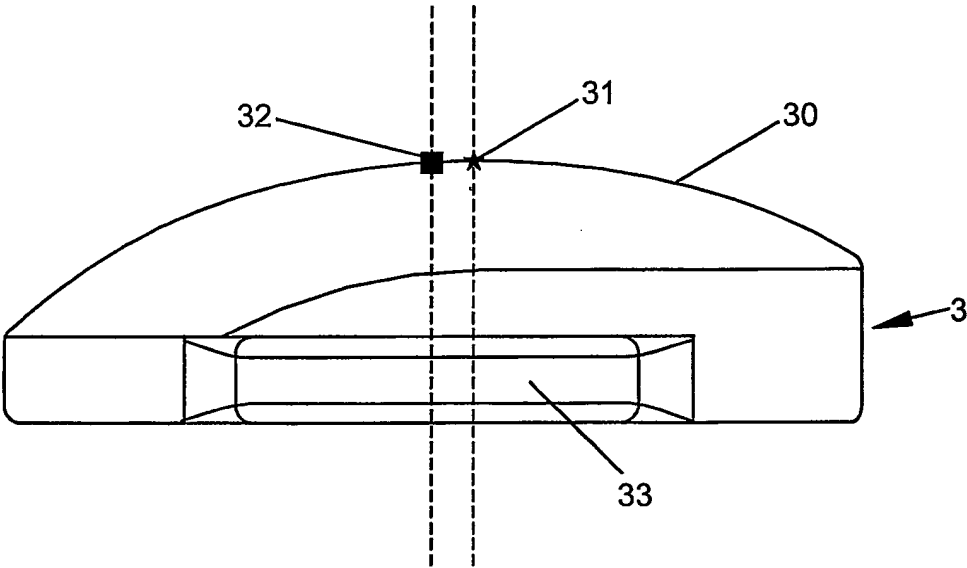


FIGURE 1B

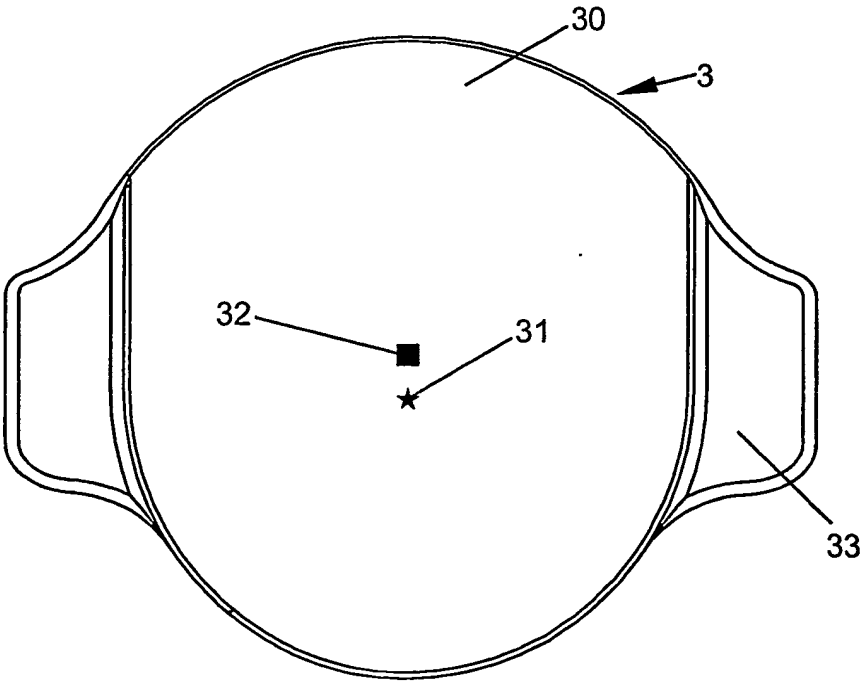

2/3

FIGURE 2A

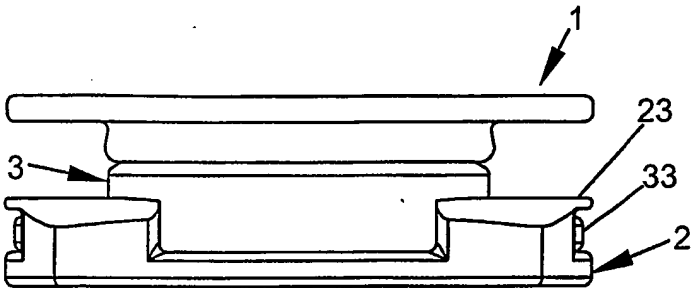


FIGURE 2B

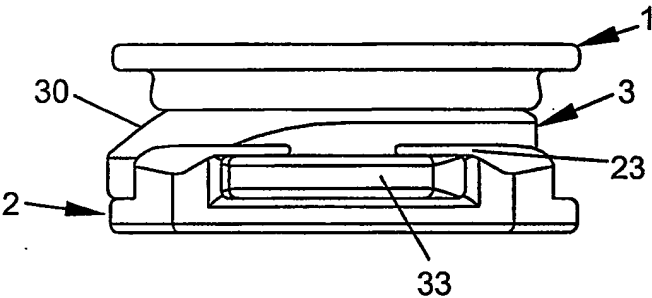


FIGURE 2C


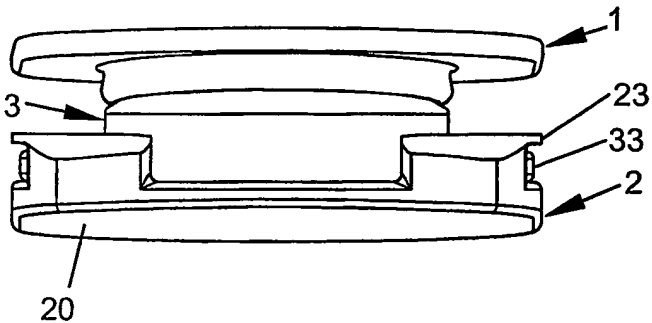


FIGURE 2D

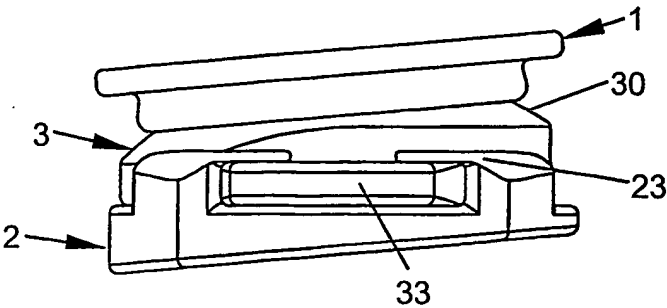

3/3

FIGURE 3A

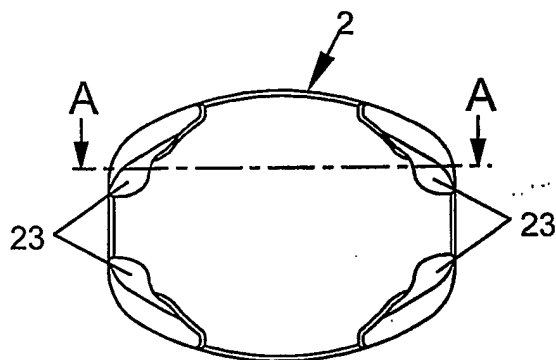


FIGURE 3B

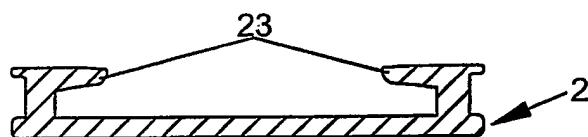


FIGURE 3C

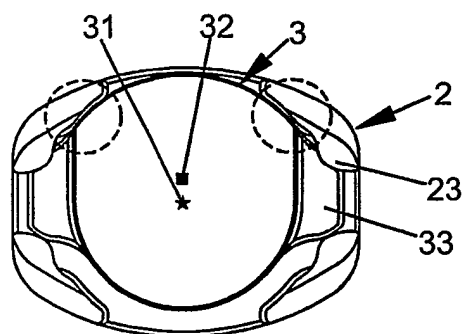


FIGURE 3D


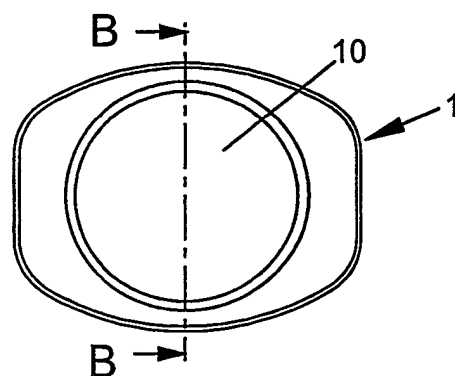


FIGURE 3E

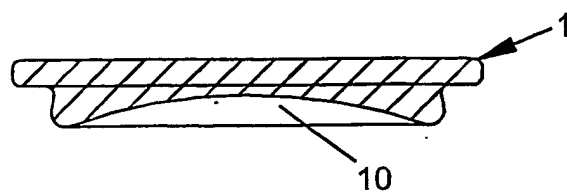

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F2/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 03/075804 A (LINK WALDEMAR GMBH CO) 18 September 2003 (2003-09-18) figures page 6, line 8 - line 25	1,7, 9-12,15, 17,18,20
Y A		6,8,16 2,13,14
X	DE 203 10 432 U (AESCULAP AG & CO KG) 18 September 2003 (2003-09-18) figures page 4, paragraph 6 - page 5, paragraph 3	1,7,9-12
X	DE 203 10 433 U (AESCULAP AG & CO KG) 4 September 2003 (2003-09-04) figures 2,3 page 8, paragraph 2	1,7,9-12
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

2 September 2005

Date of mailing of the international search report

12/09/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Stach, R

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 507 816 A (BULLIVANT MICHAEL) 16 April 1996 (1996-04-16) claims 1,4,8; figures 1,3,4 column 3, line 15 - column 4, line 42	6,8
A		1,3,4,7, 10
Y	FR 2 718 635 A (AXCYL MEDICAL) 20 October 1995 (1995-10-20) figures page 3, line 33 - page 4, line 34	16
A		1,3,4,6, 7,9-15, 17
A	US 5 888 226 A (ROGOZINSKI CHAIM) 30 March 1999 (1999-03-30) figures 7-9 column 4, line 3 - line 21 column 5, line 36 - column 6, line 13	1,2
A	US 2004/002761 A1 (ROGERS CHRISTOPHER ET AL) 1 January 2004 (2004-01-01) figures 1b,20c,21b,22b paragraph '0081!	1,7, 10-13
A	US 2004/073311 A1 (FERREE BRET A) 15 April 2004 (2004-04-15)	

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03075804	A	18-09-2003	EP 1344507 A1	17-09-2003
			AU 2002346916 A1	22-09-2003
			AU 2003206943 A1	22-09-2003
			BR 0215639 A	21-12-2004
			BR 0303375 A	23-03-2004
			CA 2476479 A1	18-09-2003
			CA 2482403 A1	18-09-2003
			CN 1622793 A	01-06-2005
			WO 03075803 A1	18-09-2003
			WO 03075804 A1	18-09-2003
			EP 1482875 A1	08-12-2004
			EP 1482876 A1	08-12-2004
			JP 2005519673 T	07-07-2005
			US 2003176923 A1	18-09-2003
			US 2004083000 A1	29-04-2004
DE 20310432	U	18-09-2003	DE 20310432 U1	18-09-2003
DE 20310433	U	04-09-2003	DE 20310433 U1	04-09-2003
US 5507816	A	16-04-1996	AU 2954192 A	28-06-1993
			WO 9310725 A2	10-06-1993
FR 2718635	A	20-10-1995	FR 2718635 A1	20-10-1995
US 5888226	A	30-03-1999	NONE	
US 2004002761	A1	01-01-2004	AU 2003205001 A1	22-01-2004
			BR 0301744 A	24-08-2004
			CA 2433725 A1	27-12-2003
			EP 1374808 A1	02-01-2004
			JP 2004130077 A	30-04-2004
			US 2004002762 A1	01-01-2004
US 2004073311	A1	15-04-2004	AU 2003228655 A1	10-11-2003
			CA 2483226 A1	06-11-2003
			EP 1496818 A1	19-01-2005
			WO 03090649 A1	06-11-2003
			US 2003199981 A1	23-10-2003
			US 2004030390 A1	12-02-2004
			US 2003233148 A1	18-12-2003
			US 2003233097 A1	18-12-2003
			US 2004236342 A1	25-11-2004